



## 5660

Design By Arik Levy

North pendant light designed by Arik Levy. A lacquered aluminum shade with a white interior holds the LED light source while suspended by a black cable. A round steel canopy matches the finish of the shade. Available in charcoal gray, matte beige or matte white lacquer.

### Spec sheet



**Optional: Extra cable length**  
Min. Quantity, upcharge and extra lead time apply

<b>Finish</b>	<ul style="list-style-type: none"> <li><span style="display: inline-block; width: 12px; height: 12px; background-color: #f0f0f0; border-radius: 50%; margin-right: 5px;"></span> 10 White NCS S 0300-N</li> <li><span style="display: inline-block; width: 12px; height: 12px; background-color: #c0c0c0; border-radius: 50%; margin-right: 5px;"></span> 24 Beige M1 NCS S2005-Y50R</li> <li><span style="display: inline-block; width: 12px; height: 12px; background-color: #000000; border-radius: 50%; margin-right: 5px;"></span> 11 Black NCS S 8500N</li> </ul>
<b>LED color temperature</b>	2700 K
<b>Dimming</b>	0-10V <b>Optional</b> DALI Min. Quantity, upcharge and extra lead time apply
<b>Installation type</b>	Surface

<b>Materials</b>	Shade: Aluminum Canopy: Steel Diffuser: Acrylic
<b>Light source</b>	1 x LED 9W 350mA
<b>LED</b>	CRI>90 1041 lm 116 2700 K
<b>Driver</b>	CC - Constant Current 350 120-277 V 50/60 HZ
<b>Remarks</b>	Cable can be adjusted in the field. 157 max. cULus Certification is only approved for 120V


Dimmable    LED    IP20  
 Multi-volt    Dry Location    50-60Hz  
 0-10V

<b>Application</b>	Pendants
<b>Packaging</b>	1 Box 8.54 m x 8.54 m x 9.45 m Gross weight 5.07 Net weight 2.75 Vol. 0.3991

#### Lighting effect

##### General Lighting

Fixture suitable for general ambient illumination, distributing light mainly upward and/or downward.



#### Photometric Data



<b>Efficiency</b>	73.63
<b>Coordination System</b>	CG
<b>Total Flux</b>	766.49 lm
<b>Maximum Value</b>	407.00 cd/klm

## 5662

Design By Arik Levy

North pendant light designed by Arik Levy. A lacquered aluminum shade with a white interior holds the LED light source while suspended by a black cable. A round steel canopy matches the finish of the shade. Available in charcoal gray, matte beige or matte white lacquer.


### Spec sheet

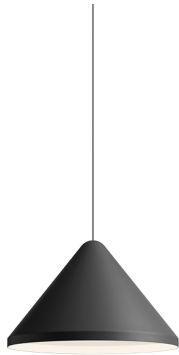

**Optional: Extra cable length**  
 Min. Quantity, upcharge and extra lead time apply

<b>Finish</b>	<ul style="list-style-type: none"> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #f0f0f0; border-radius: 50%; margin-right: 5px;"></span> 10 White NCS S 0300-N</li> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #333; border-radius: 50%; margin-right: 5px;"></span> 11 Black NCS S 8500N</li> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #c0c0c0; border-radius: 50%; margin-right: 5px;"></span> 24 Beige M1 NCS S2005-Y50R</li> </ul>
<b>LED color temperature</b>	2700 K
<b>Dimming</b>	0-10V <b>Optional</b> DALI Min. Quantity, upcharge and extra lead time apply
<b>Installation type</b>	Surface

<b>Materials</b>	Shade: Aluminum Canopy: Steel Diffuser: Acrylic
<b>Light source</b>	1 x LED 9W 350mA
<b>LED</b>	CRI>90 1041 lm 116 2700 K
<b>Driver</b>	CC - Constant Current 350 120-277 V 50/60 HZ
<b>Remarks</b>	Cable can be adjusted in the field. 157 max.




<b>Application</b>	Pendants
<b>Packaging</b>	1 Box 21.14 m x 21.14 m x 14.17 m Gross weight 10.57 Net weight 4.96 Vol. 3.6657

#### Lighting effect

##### General Lighting

Fixture suitable for general ambient illumination, distributing light mainly upward and/or downward.



#### Photometric Data


<b>Efficiency</b>	72.81
<b>Coordination System</b>	CG
<b>Total Flux</b>	757.94 lm
<b>Maximum Value</b>	420.06 cd/klm

## 5664

Design By Arik Levy

North pendant light designed by Arik Levy. A lacquered aluminum shade with a white interior holds the LED light source while suspended by a black cable. A round steel canopy matches the finish of the shade. Available in charcoal gray, matte beige or matte white lacquer.


### Spec sheet



**Optional: Extra cable length**  
Min. Quantity, upcharge and extra lead time apply

<b>Finish</b>	<ul style="list-style-type: none"> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #f0f0f0; border-radius: 50%; margin-right: 5px;"></span> 10 White NCS S 0300-N</li> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #c0c0c0; border-radius: 50%; margin-right: 5px;"></span> 24 Beige M1 NCS S2005-Y50R</li> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #000000; border-radius: 50%; margin-right: 5px;"></span> 11 Black NCS S 8500N</li> </ul>
<b>LED color temperature</b>	2700 K
<b>Dimming</b>	0-10V <b>Optional</b> DALI Min. Quantity, upcharge and extra lead time apply
<b>Installation type</b>	Surface

<b>Materials</b>	Shade: Aluminum Canopy: Steel Diffuser: Acrylic
<b>Light source</b>	1 x LED 9W 350mA
<b>LED</b>	CRI>90 1041 lm 116 2700 K
<b>Driver</b>	CC - Constant Current 350 120-277 V 50/60 HZ
<b>Remarks</b>	Cable can be adjusted in the field. 157 max.




<b>Application</b>	Pendants
<b>Packaging</b>	1 Box 28.62 m x 28.62 m x 12.6 m Gross weight 13.77 Net weight 6.5 Vol. 5.9718

#### Lighting effect

##### General Lighting

Fixture suitable for general ambient illumination, distributing light mainly upward and/or downward.



#### Photometric Data



<b>Efficiency</b>	79.80
<b>Coordination System</b>	CG
<b>Total Flux</b>	830.69 lm
<b>Maximum Value</b>	321.16 cd/klm

## 5670

Design By Arik Levy

North pendant light designed by Arik Levy. A lacquered aluminum shade with a white interior holds the LED light source while suspended by a black cable. A round steel canopy matches the finish of the shade. Available in charcoal gray, matte beige or matte white lacquer.

### Spec sheet



**Optional: Extra cable length**  
Min. Quantity, upcharge and extra lead time apply


<b>Finish</b>	<ul style="list-style-type: none"> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #f0f0f0; border-radius: 50%; margin-right: 5px;"></span> 10 White NCS S 0300-N</li> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #333; border-radius: 50%; margin-right: 5px;"></span> 11 Black NCS S 8500N</li> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #c0c0c0; border-radius: 50%; margin-right: 5px;"></span> 24 Beige M1 NCS S2005-Y50R</li> </ul>
<b>LED color temperature</b>	2700 K
<b>Dimming</b>	0-10V <b>Optional</b> DALI Min. Quantity, upcharge and extra lead time apply
<b>Installation type</b>	Surface

<b>Materials</b>	Cane: Carbon fiber Shade: Aluminum Canopy: Steel Diffuser: Acrylic
<b>Light source</b>	1 x LED 9W 350mA
<b>LED</b>	CR>90 1041 lm 116 2700 K
<b>Driver</b>	CC - Constant Current 350 120-277 V 50/60 HZ
<b>Remarks</b>	Cable can be adjusted in the field. 157 max.

Dimmable
LED
IP20  
Multi-volt
UL
Dry Location
50-60Hz  
0-10V

<b>Application</b>	Pendants
<b>Packaging</b>	2 Box 81.5 m x 4.92 m x 4.92 m Gross weight 12.67 Net weight 4.41 Vol. 1.5397

**Lighting effect**  
**General Lighting**  
Fixture suitable for general ambient illumination, distributing light mainly upward and/or downward.




<b>Photometric Data</b>	
<b>Efficiency</b>	73.63
<b>Coordination System</b>	CG
<b>Total Flux</b>	766.49 lm
<b>Maximum Value</b>	407.00 cd/klm

## 5672

Design By Arik Levy

North pendant light designed by Arik Levy. A lacquered aluminum shade with a white interior holds the LED light source while suspended by a black cable. A round steel canopy matches the finish of the shade. Available in charcoal gray, matte beige or matte white lacquer.

### Spec sheet



**Optional: Extra cable length**  
Min. Quantity, upcharge and extra lead time apply


<b>Finish</b>	<ul style="list-style-type: none"> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #f0f0f0; border-radius: 50%; margin-right: 5px;"></span> 10 White NCS S 0300-N</li> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #333; border-radius: 50%; margin-right: 5px;"></span> 11 Black NCS S 8500N</li> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #c0c0c0; border-radius: 50%; margin-right: 5px;"></span> 24 Beige M1 NCS S2005-Y50R</li> </ul>
<b>LED color temperature</b>	2700 K
<b>Dimming</b>	0-10V <b>Optional</b> DALI Min. Quantity, upcharge and extra lead time apply
<b>Installation type</b>	Surface

<b>Materials</b>	Shade: Aluminum Canopy: Steel Cane: Carbon fiber Diffuser: Acrylic
<b>Light source</b>	1 x LED 9W 350mA
<b>LED</b>	CR>90 1041 lm 116 2700 K
<b>Driver</b>	CC - Constant Current 350 120-277 V 50/60 HZ
<b>Remarks</b>	Cable can be adjusted in the field. 157 max.

Dimmable    LED    IP20  
 Multi-volt    Dry Location    50-60Hz  
 0-10V

<b>Application</b>	Pendants
<b>Packaging</b>	2 Box 21.14 m x 21.14 m x 14.17 m Gross weight 18.17 Net weight 6.61 Vol. 4.8064

**Lighting effect**  
**General Lighting**  
Fixture suitable for general ambient illumination, distributing light mainly upward and/or downward.





<b>Photometric Data</b>	
<b>Efficiency</b>	72.81
<b>Coordination System</b>	CG
<b>Total Flux</b>	757.94 lm
<b>Maximum Value</b>	420.06cd/klm

## 5674

Design By Arik Levy

North pendant light designed by Arik Levy. A lacquered aluminum shade with a white interior holds the LED light source while suspended by a black cable. A round steel canopy matches the finish of the shade. Available in charcoal gray, matte beige or matte white lacquer.

### Spec sheet

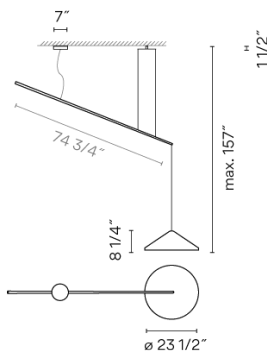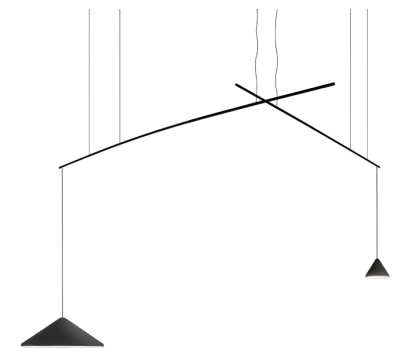

**Optional: Extra cable length**  
Min. Quantity, upcharge and extra lead time apply

<b>Finish</b>	<ul style="list-style-type: none"> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #8B4513; border-radius: 50%; margin-right: 5px;"></span> 24 Beige M1 NCS S2005-Y50R</li> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #F5F5DC; border-radius: 50%; margin-right: 5px;"></span> 10 White NCS S 0300-N</li> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #000000; border-radius: 50%; margin-right: 5px;"></span> 11 Black NCS S 8500N</li> </ul>
<b>LED color temperature</b>	2700 K
<b>Dimming</b>	0-10V <b>Optional</b> DALI Min. Quantity, upcharge and extra lead time apply
<b>Installation type</b>	Surface

<b>Materials</b>	Shade: Aluminum Canopy: Steel Cane: Carbon fiber Diffuser: Acrylic
<b>Light source</b>	1 x LED 9W 350mA
<b>LED</b>	CR>90 1041 lm 116 2700 K
<b>Driver</b>	CC - Constant Current 350 120-277 V 50/60 HZ
<b>Remarks</b>	Cable can be adjusted in the field. 157 max.


Dimmable    LED    IP20  
 Multi-volt    Dry Location    50-60Hz  
 0-10V

<b>Application</b>	Pendants
<b>Packaging</b>	2 Box 28.62 m x 28.62 m x 12.6 m Gross weight 21.37 Net weight 8.15 Vol. 7.1124

#### Lighting effect

##### General Lighting

Fixture suitable for general ambient illumination, distributing light mainly upward and/or downward.



#### Photometric Data

<b>Efficiency</b>	79.80
<b>Coordination System</b>	CG
<b>Total Flux</b>	830.69 lm
<b>Maximum Value</b>	321.16 cd/klm