



USBEL090
Design by Manuel Vivian

Collection consisting of suspended lamps with a metal frame covered with strips of extra smooth flame-retardant pongé fabric. Available in several colors and sizes.

Typology: SUSPENDED


- Ratings**
- Downlight and uplight
 - Installs over 4 in. octagonal J-box
 - Power supply 120V AC
 - Switch mode: on-off
 - Steel frame
 - Opalescent diffuser

- L10 BUILT IN LED MODULE VERSION**
- CCT 3000 K, CRI 90
 - Power supply 120/277V AC
 - Dimmable 0-10V

- GU24 LED VERSION**
- CCT 2700 K, CRI 80
 - Dimmable ELV trailing edge, phase cut

Product code composition
BELL / diffuser INCLUDED, with upward and downward lighting

Type	Article	Colours	Finish	Source
US	BEL 090 E26	BC white	XX	E26 4 x Max 17W LED or 4 x Max 26W fluo
	BEL 090 LED	BW warm white		LED GU24 4x15W - included 120V _{AC} - CRI80 diffused beam - 2700K 6400 lm - 107 lm/W dimmable ELV TRAILING EDGE PHASE CUT LED
		GI gold yellow		
US	BEL 090 L10	NE black		L10 95W LED - integrated 120/277V _{AC} - CRI90 diffused beam - 3000K 10700 lm - 113 lm/W dimmable 0-10V LED
		RS red		

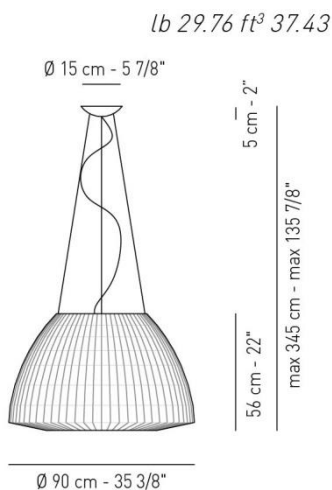

example composition code | US | BEL090LED | GI | XX

Available colors



BC White **BW** Warm white **GI** Gold yellow **NE** Black **RB** Burgundy

USBEL090_ _ _ _ _XX

CUSTOMER _____

NOTES _____

Luminous flux for all built-in LED luminaires is shown at source level.
Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the accuracy of this data sheet.